
AXIS DP - Agriculture range

POWERFULL DEGREASER-CLEANER FOR AGRICULTURE

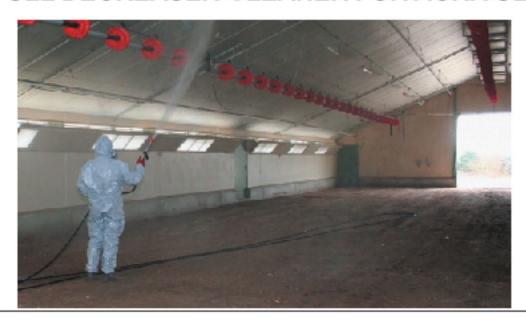

- High efficiency on industry and food greases.
- Compatible with food contact.
- May be used with a foam gun.
- Pasivating action prevent metals from oxydation.
- Emulsifies and dissolves persistent oils and greases.
- Very concentrated, use at 1%.
- · Biodegradable and non corrosive product.

PHYSICOCHEMICAL CHARACTERISTICS:

- Clear yellow limpid and odourless liquid.
- Non-flammble. Flash point : none.
- Density: 1,04 ± 0,01.
- Refractive index : 1,360 ± 0,005.
- Concentrated product's pH : > 12 (pH à 10% : 12,5 \pm 0,5 ; pH at 1% : 9,5 \pm 0,5).
- Biodegradable at more than 90%.
- Fully water miscible.
- Freezing point : approximatly 2°C.
- Amonia solution based on degreasing material, corrosion inhibitor, surfactant and wetting agents and lime stone sequestrant.
- Axis DP use is common in agriculture. Its wetting and foaming propierties allows a foam gun spraying on vertical surfaces with a perfect "traceabality" - visual - and an increased contact time.
- Not corrosive. Ideal either for naked metalic nor painted surfaces. Corrosion ihnibitor. Does not jam clamps - in electroplated steel or aluminium. Good results with sprayers and plant-health ramp.
- Active on industrial greases and plant-health product.
- Degreaser and cleaner.
- Passiver poststone steels corrosion des aciers: use **AXIS DP** at10 %. Do not rinse parts.
- Safe to use on almost all surfaces at the recommended doses steel, stainlessteel, plastics, tiling.
- Prior test in case of use on aluminium, light alloy and some paint coating of which aspect can modified by the use of concentrated doses.
- Actifve in hard water limestone.
- Food contact compatible.

SAFETY / ENVIRONNEMENT:

- More than 90% biodegradable.
- AXIS DP is classified: Irritant.
- In case of eye contact rinse out thoroughly with water and consult a eye specialist doctor.
- It's highly recommended to wear appropriate gloves while handling the product concentrated or for frequent or long-lasting use.
- AXIS DP components are listed in the list of the french modified ministerial decree dated 08/09/99 modifié, regarding the cleaning material product which may come in contact with foodstuff.

INSTRUCTION FOR USE:

- Dilute AXIS DP between 0,5 % and 10 % in water according to the application mode and the the dirt level:
- * use by spraying on the walls and floors : between 1 and 5 %
- * use in steam or hot water machine on engines and bodywork grape harvester : 0.5 % à 2 %
- * use by immersion before painting or label peel off : between 5 and 10 %
- * use for the passivation of metallic parts : 10 %

